


Quick Specs


HP Compaq dx2009 VSFF Business Desktop

System Details

Overview

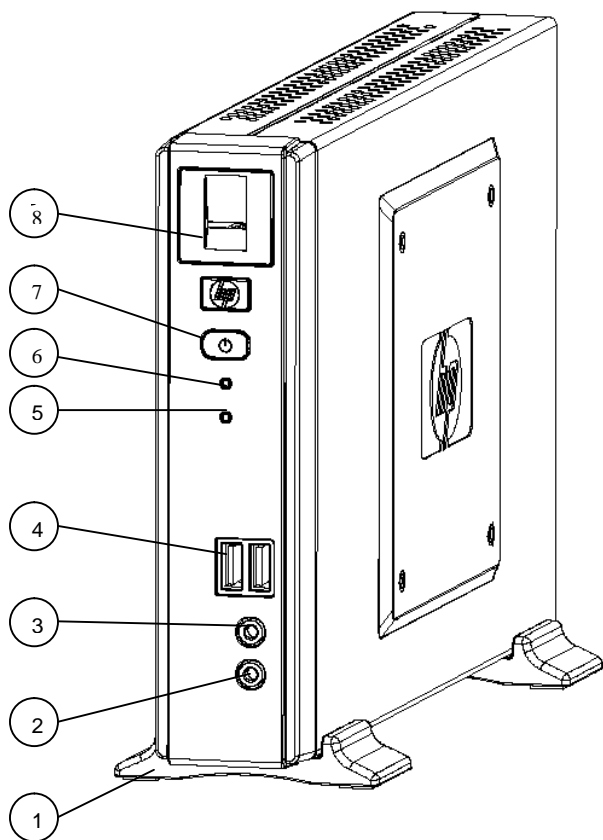

1. Foot stand
2. Microphone connector
3. Speaker/Headphone connector
4. USB connectors (two in front)
5. Flash Activity LED
6. Power On LED
7. Power button
8. Bio metric sensor (optional)

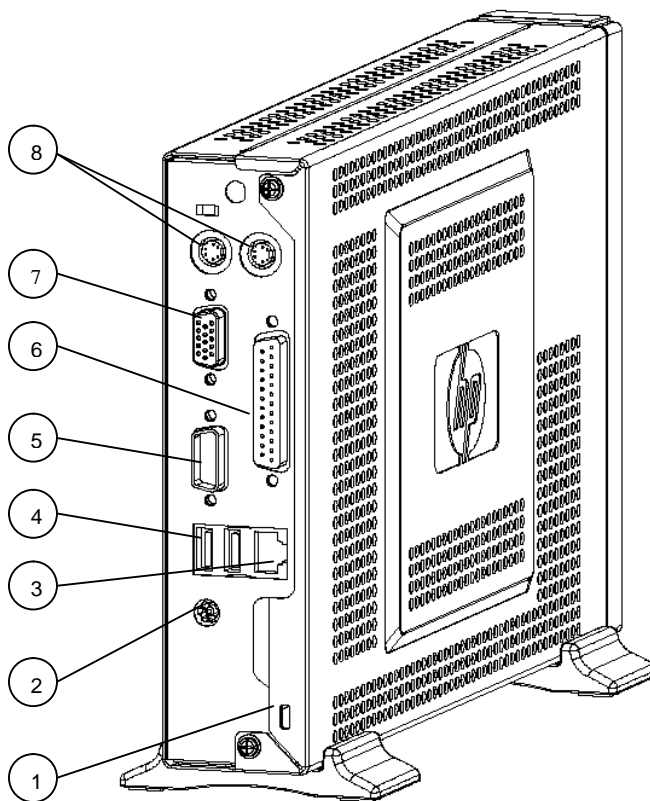

1. Kensington Cable Locking slot
2. Power connector
3. Ethernet RJ-45 connector
4. USB connectors (two in rear)
5. Serial connector
6. Parallel connector
7. VGA Monitor connector
8. PS/2 connectors (Keyboard and mouse)

At A Glance

- Chipset integrated S3 Graphics UMA Core.
- VIA C7 CPU 1.0GHz.
- Single channel DDRII SDRAM system memory.
- Internal Hard Drive.
- Integrated Realtek Audio.
- Integrated Realtek 10/100 Network connection.
- Internal speaker (Optional).

System Details

- Linux Customized Operating System.
- Innovative HP Quick Release (Optional).
- Designed and Tested for HP quality standards & Indian harsh environmental conditions.
- Protected by HP Services. Terms and conditions as applicable for India. Certain restrictions & exclusions apply.

Standard Features- Models

Processor VIA C7 (1.0GHz).

Operating System Linux Image.

Memory

- DDRII SDRAM 667MHz*
- 2 x DIMM slots
- Support for single channel configuration
- Supports up to 2GB

*VIA chipset supports 533MHz DDRII SDRAM.

Hard Drives

- 80-GB Serial ATA 3.0-Gb/s Hard Drive (5400/7200 RPM) or
- 160-GB Serial ATA 3.0-Gb/s Hard Drive (7200 RPM)

Integrated Graphics

- Chipset integrated S3 Graphics UMA Core

Audio

- Front Audio with Realtek ALC655 CODEC Chip.

LAN

- Integrated Realtek 10/100 (RTL 8100C) network controller.

SATA

- Internal two Serial ATA interfaces

Keyboard

- USB or PS/2 (both supported)
- USB or PS/2 Keyboard included with every Computer.

Mouse

- USB or PS/2 (both supported)
- USB or PS/2 Mouse included with every Computer.

Adaptor

- 65W AC External Power Adaptor.

Quick Specs

HP Compaq dx2009 VSFF Business Desktop

Technical Specifications - Environmental Data

Options

Part Number

Accessories

HP Quick Release Kit to connect HP LCD Monitor.

EM870AA

Monitors

HP L1750 17" LCD Monitor

GF904AA#ACJ

HP L1506s LCD Monitor ALL

GL831AA#ACJ

HP L1908w Wide LCD Monitor

GP536AA#ACJ

HP L1908wi Wide LCD Monitor

GP537AA#ACJ

HP L1710 17-inch LCD Monitor ALL

GS917AA#ACJ

HP L1910 19-inch LCD Monitor

GS918AA#ACJ

HP w17e 17 Inch LCD Monitor

GV537AA#ACJ

HP v7650 CRT Monitor ALL

PF996AA#ACJ

HP s7540 CRT Monitor ALL

PF997AA#ACJ

HP s5502 CRT Monitor ALL

PQ560AA#ACJ

L1506 LCD Monitor ALL

PX848AA#ACJ

HP LP1965 LCD Monitor ALL

RA373AA#ACJ

HP LP1965 LCD Monitor ALL

RA374AA#ACJ

HP L2045w LCD Monitor ALL

RB145AA#ACJ

Speaker bar

EE418AA (Supported on LCDs)

Technical Specifications

Processor

VIA C7 (1.0GHz)

Memory

Single channel DDRII SDRAM system memory, (2) DIMM, supports up to 2GB.

Hard Drives

80GB (5400rpm or 7200rpm) or 160GB (7200rpm).

Graphics

Chipset integrated S3 Graphics UMA Core.

Input/Output

Keyboard HP PS2/USB Standard Keyboard

Peripheral Support

Mouse HP PS2/USB Optical mouse

Security

Three layers of hardware security: Password protection, Chassis intrusion switch (Optional), Bio-metric finger print device on chassis front bezel (Optional).

Kensington Cable Lock (Optional)

PC766A (for the accessories supported)

Networking

10/100 BaseT Fast Ethernet, (RJ-45)

I/O ports and connectors

(4) USB ports (two in front, two in rear), (2) Front Audio Ports (Mic and Headphone), (2) PS/2 Ports for Keyboard and Mouse , (1) LPT Port , (1) COM port, (1) VGA port , (1) RJ-45 Port.

Dimensions H x W x D (approximate)

Height	7.56in	192mm
Width	2.00in	51.08mm
Depth	11.36in	288.4mm

Weight (approximate)

4.2lb	1.9kg
-------	-------

Température Range

Operating	50° to 140° F	10° to 40°C
Non-operating	-22° to 140°F	-30° to 60°C

Quick Specs

HP Compaq dx2009 VSFF Business Desktop

Technical Specifications - Environmental Data

Relative Humidity (non-condensing)	Operating	10-90%	10-90%
	Non-operating	5-95%	5-95%
Power Supply	Operating Voltage Range	100-240V AC	100-240V AC
	Related Line Frequency	50-60Hz	50-60Hz
Output Voltage	19VDC		
Rated Output Current (max)	3.42Amp		
Warranty	Warranty as per the terms and conditions mentioned in the warranty manual.		